
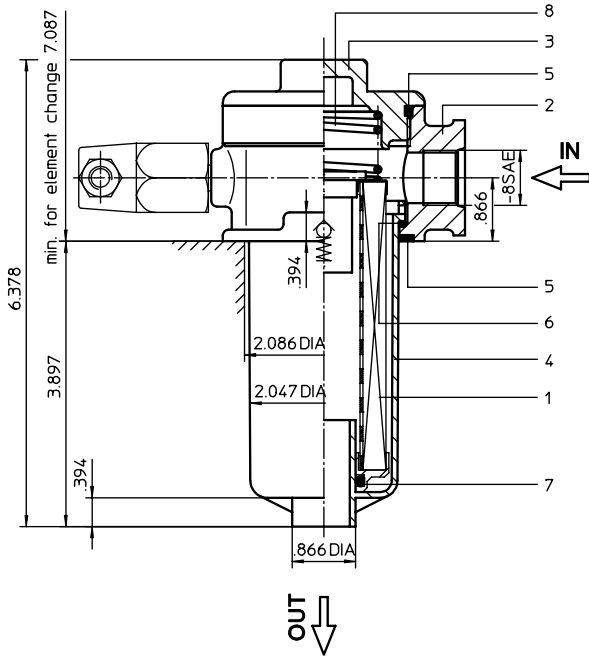


RETURN LINE FILTER

Series TEF 41 145 PSI

Sheet No.
1040 D

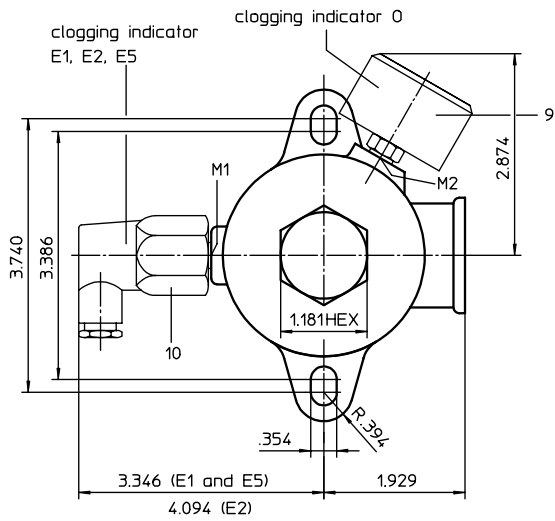

When equipped with one clogging indicator use preferably connection M1.

1. Type index:

1.1. Complete filter: (ordering example)

TEF.41.10VG.16.S.P.-.UG.3.-.E1.O (filter with by-pass valve)

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

TEF.41.10VG.30.E.P.-.UG.3.-.E1.O (filter without by-pass valve)

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

1 series:

TEF = tank-mounted return-line-filter

2 nominal size: 41

3 filter-material and filter-fineness:

80 G = 80 μm , 40 G = 40 μm , 25 G = 25 μm stainless steel wire mesh
 25 VG = 20 $\mu\text{m}_{(c)}$, 16 VG = 15 $\mu\text{m}_{(c)}$, 10 VG = 10 $\mu\text{m}_{(c)}$, 6 VG = 7 $\mu\text{m}_{(c)}$,
 3 VG = 5 $\mu\text{m}_{(c)}$ Interpor fleece (glass fiber)
 25 P = 25 μm , 10 P = 10 μm paper only with 01E.41

4 resistance of pressure difference for filter element:

16 = 01E.41 for Δp 232 PSI (standard with by-pass valve)
 30 = 01E.60 for Δp 435 PSI (standard without by-pass valve)

5 filter element design:

S = with by-pass valve (01E.41) Δp 29 PSI
 E = without by-pass valve (01E.60)

6 sealing material:

P = Nitrile (NBR)
 V = Viton (FPM)

7 filter element specification: (see catalog)

- = standard
 VA = stainless steel
 IS06 = see sheet-no. 31601

8 connection:

UG = thread connection

9 connection size:

3 = - 8 SAE

10 filter housing specification: (see catalog)

- = standard
 IS06 = see sheet-no. 31605

11 clogging indicator at M1:

- = without
 O = visual, see sheet-no. 1616
 E1 = pressure switch, see sheet-no. 1616
 E2 = pressure switch, see sheet-no. 1616
 E5 = pressure switch, see sheet-no. 1616

12 clogging indicator at M2:

possible indicators see position 11 of the type index

1.2. Filter element: (ordering example)

01E.41.10VG.16.S.P.-

1	2	3	4	5	6	7
---	---	---	---	---	---	---

(with by-pass valve)

01E.60.10VG.30.E.P.-

1	2	3	4	5	6	7
---	---	---	---	---	---	---

(without by-pass valve)

1 series:

01E. = filter element according to INTERNORMEN factory specification

2 nominal size: 41, 60

3 - 7 see type index-complete filter

weight: 1.76 lbs.

EDV 08/03

Changes of measures and design are subject to alteration!

2. Spare parts:

item	qty.	designation	dimension	article-no.	
1	1	filter element with by-pass	01.E 41		
	1	filter element without by-pass	01.E 60		
2	1	filter head	TEF 41 - 55	308646	
3	1	filter cover	M 60 x 2	303621	
4	1	filter bowl	TEF 41	306673	
5	2	O-ring	56 x 3	305072 (NBR)	305322 (FPM)
6	1	O-ring	50 x 2,5	305239 (NBR)	305321 (FPM)
7	1	O-ring	22 x 3,5	304341 (NBR)	304392 (FPM)
8	1	spring	DA = 40	304982	
9	1	clogging indicator visual	O	301721	
10	1	clogging indicator electrical	E1, E2 or E5	see sheet-no. 1616	

3. Description:

Return-line filters in the TEF series are suitable for a working pressure up to 145 PSI.

Pressure peaks will be absorbed by a sufficient margin of safety.

The TEF-filters are directly mounted to the reservoir and connected to the return-line.

The filter element consists of a star-shaped, pleated filter material which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow is from outside to inside. Filters finer than 40 µm should use throw-away elements made of paper or Interpor fleece (glass fiber). Filter elements as fine as 5 µm₍₀₎ are available; finer filter elements on request.

INTERNORMEN-Filters can be used for petroleum-based fluids, HW emulsions, water glycols, most synthetic fluids and lubrication fluids. Consult factory for specific fluid applications.

INTERNORMEN-Filters elements are known as stable elements which have excellent filtration capabilities and a high dirt retaining capacity, therefore having a long service life. Due to its practical design, the return-line filter is easy to service.

When changing the filter element a detachable connection between the filter head and the filter bowl prevents a flow back of dirty oil into the tank.

4. Technical data:

temperature range:

+14°F to +176°F (for a short time +212°F)

operating medium:

mineral oil, other media on request

max. operating pressure:

145 PSI

opening pressure by-pass valve:

29 PSI

connection system:

thread connection

housing material:

Al-cast, glass fiber reinforced polyamide

sealing material:

Nitrile (NBR) or Viton (FPM), other materials on request

installation position:

vertical

volume tank:


.05 Gal.

Classified under the Pressure Equipment Directive 97/23/EC for mineral oil (fluid group 2), Article 3, Para. 3.


Classified under ATEX Directive 94/9/EC according to specific application (see questionnaire sheet-no. 34279-4).

5. Symbols:

without indicator



with by-pass valve



visual O



electrical contact maker
E1



electrical contact breaker
E5



electrical contact maker/breaker
E2



6. Pressure drop flow curves:

Precise flow rates see 'INT-Expert-System Filter', respectively Δp -curves; depending on filter fineness and viscosity.

7. Test methods:

Filter elements are tested according to the following ISO standards:

ISO 2941	Verification of collapse/burst resistance
ISO 2942	Verification of fabrication integrity
ISO 2943	Verification of material compatibility with fluids
ISO 3723	Method for end load test
ISO 3724	Verification of flow fatigue characteristics
ISO 3968	Evaluation of pressure drop versus flow characteristics
ISO 16889	Multi-pass method for evaluating filtration performance